


Solenoid Valve Specifications & Dimensions: 3A110-410 Series

3A Series Valve Specifications		
	Port & Mounting	Body Ported, Stackable (Stacking Hardware Included)
	Action & Motion	Air Piloted, Two Position, 3 Way
	Operating Pressure	28" Hg to 115 PSI
	Working Medium	40 micron filtered air, inert gas
	Maximum Pressure	150 PSI
	Operating Temperature	(-5 to 80 Deg. C) with non-freezing medium
	Pilot Pressure	40 to 115 PSI
	Body Material	Anodized Aluminum
	Seal Material	NBR (Buna N)
	Lubrication	Not Required

MODEL: 3A110; 3A210; 3A310; 3A410

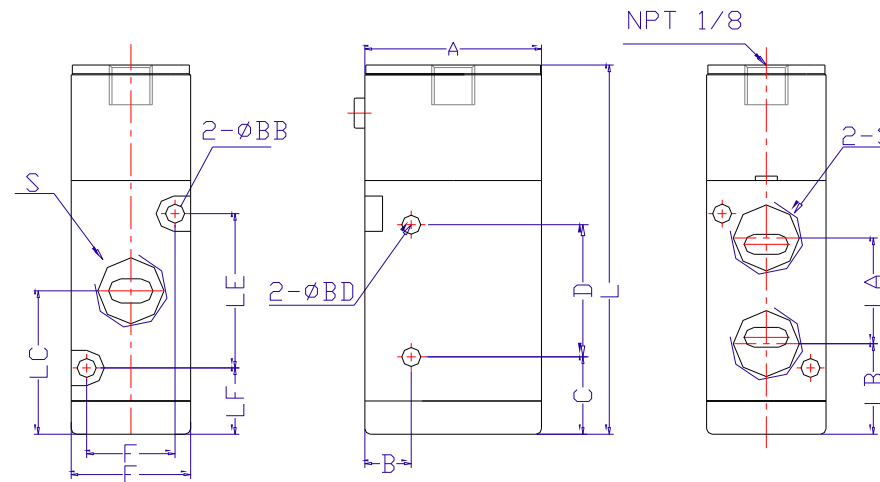

MODEL	A	B	D	E	F	L	S	W	BB	BD	LA	LB	LC	LE	LF
3A110-1/8	27	7.7	21	18.0	13	56.5	1/8	53.5	3.3	3.3	16	14.0	23	19	12.5
3A210-1/4	35	8.0	25	22.0	17	77.7	1/4	66.5	3.3	4.3	18	21.0	31	33	12.5
3A310-3/8	40	10.5	30	27.0	20	80.5	3/8	69	4.3	4.3	24	20.5	32.5	35	15
3A410-1/2	50	13.5	51	34.0	27	96.5	1/2	73.9	4.3	5.5	36	25.5	41.5	44	15.5